



Retexo Rope lanyards combine the strength and durability of rope with the premium performance of the Retexo shock absorber. Prium 10.5 mm semi-static rope lanyards have exceptional abrasion resistance and a high breaking strength. Loops and stitches are covered by a robust and compact protective system that is easy to inspect. Certified for horizontal use over sharp edges ($r \geq 0.5$ mm). The Retexo is a next generation energy absorber designed to be particularly light and compact. Energy absorption is optimized to limit extension in the event of a fall as much as possible while still achieving a low fall arrest force. With lanyards with a total length up to 200 cm, the Retexo is certified for workers with a maximum total weight up to 130 kg. Ideal in situations with limited clearance (< 4 m) when used with lanyards with a total length up to 150 cm. Robust case with zip closure for easy inspection of the fall indicator and the identification label. Case is removable and washable. Equipped with NFC TRACK tag for digital identification.

EDGE TESTED




Certified for horizontal use over an edge

DOUBLE + 1176 + 2x0984 135 cm

Case with zip closure for easy inspection of the fall indicator and the identification label. Case is removable and washable.

Retexo absorber with high load capacity: up to 130 kg!

10.5 mm semi-static rope: exceptional abrasion resistance and a high breaking strength

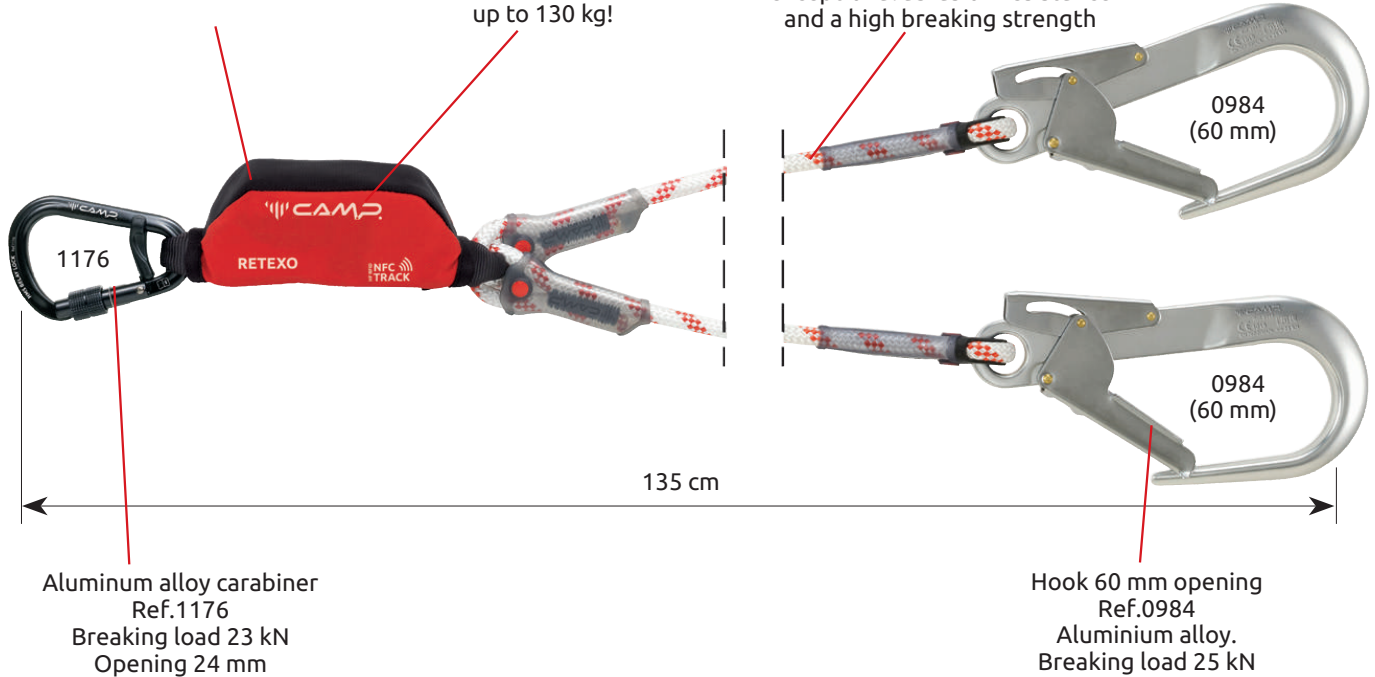

Aluminum alloy carabiner
Ref.1176
Breaking load 23 kN
Opening 24 mm

Hook 60 mm opening
Ref.0984
Aluminium alloy.
Breaking load 25 kN

| Ref. | Product name | Weight | | Strength | Working load Max | CE | | EAC |
|---------|---|--------|------|----------|------------------|--------|--------------|-----|
| | | g | oz | kN | kg | | | |
| 5050203 | RETEXO ROPE DOUBLE + 1176 + 2x0984 135 cm | 1480 | 59.3 | 15 | 130 | EN 355 | PPE-R/11.074 | |

Loops and stitches are covered by a robust and compact protective system that is easy to inspect




Stitches are covered by a transparent layer for easy inspection. Loops are protected by a plastic system to avoid the wear and tear on the rope.

Case with zip closure for easy inspection of the fall indicator and the identification label.
Case is removable and washable.
Equipped with NFC TRACK tag for digital identification.




CE LABEL

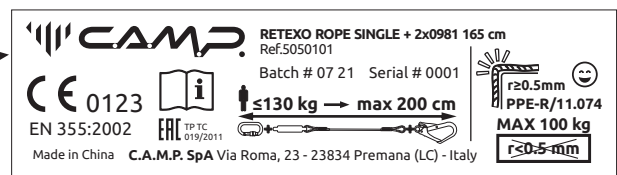

One label with all the information.

FALL INDICATOR LABEL

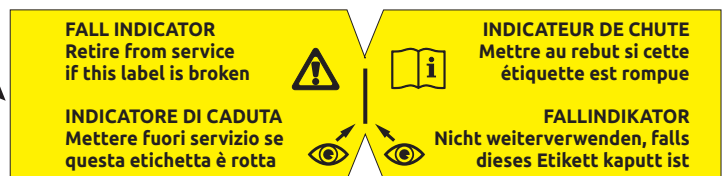

Retire from service if this label is broken

A

Ha
Clearance distance below the anchor point (m)

| Ha | Standard Users ≤ 100 kg | | | | Heavy Users ≤ 130 kg | | | |
|------|-------------------------|------|------|------|----------------------|------|------|--|
| | Fall factor | | | | Fall factor | | | |
| | 0 | 1 | 2 | 0 | 1 | 2 | | |
| 1,20 | 3,70 | 4,10 | 4,50 | 1,20 | 3,70 | 4,25 | 4,80 | |
| 1,40 | 3,90 | 4,35 | 4,80 | 1,40 | 3,90 | 4,50 | 5,20 | |
| 1,50 | 4,00 | 4,50 | 5,00 | 1,50 | 4,00 | 4,65 | 5,40 | |
| 1,60 | 4,10 | 4,65 | 5,20 | 1,60 | 4,10 | 4,80 | 5,60 | |
| 1,80 | 4,30 | 4,90 | 5,45 | 1,80 | 4,30 | 5,10 | 5,90 | |
| 2,00 | 4,50 | 5,15 | 5,70 | 2,00 | 4,50 | 5,40 | 6,20 | |

B

HF
Clearance distance below the user's feet (m)

| Standard Users ≤ 100 kg | | | | | | Heavy Users ≤ 130 kg | | | | | |
|-------------------------|------|------|-------------|------|------|----------------------|------|------|-------------|------|------|
| HF | | | Fall factor | | | HF | | | Fall factor | | |
| 2 | | | 2 | | | 2 | | | 2 | | |
| A | 2,00 | 6,20 | A | 2,00 | 6,70 | A | 2,00 | 6,20 | A | 2,00 | 6,70 |

C

B
Extension of the energy absorber (m)

| Standard Users ≤ 100 kg | | | | | | Heavy Users ≤ 130 kg | | | | | |
|-------------------------|-------------|------|------|------|-------------|----------------------|------|--|--|--|--|
| B | Fall factor | | | B | Fall factor | | | | | | |
| | 0 | 1 | 2 | | 0 | 1 | 2 | | | | |
| 1,20 | 0 | 0,40 | 0,80 | 1,20 | 0 | 0,55 | 1,10 | | | | |
| 1,40 | | 0,45 | 0,90 | 1,40 | | 0,60 | 1,30 | | | | |
| 1,50 | | 0,50 | 1,00 | 1,50 | | 0,65 | 1,40 | | | | |
| 1,60 | | 0,55 | 1,10 | 1,60 | | 0,70 | 1,50 | | | | |
| 1,80 | | 0,60 | 1,15 | 1,80 | | 0,80 | 1,60 | | | | |
| 2,00 | | 0,65 | 1,20 | 2,00 | | 0,90 | 1,70 | | | | |

C.A.M.P. presents in this catalog a **complete solution for the digital management of PPE**, both for allocation to users and for periodic inspections: the **NFC TRACK hardware tags on the products** work seamlessly with the **G.T.S. - Gear Tracking System software** to make the system very intuitive and easy to use.

NFC TRACK chips are installed on many C.A.M.P. products (harnesses, helmets, Retexo lanyards). They **can also be attached directly on any PPE** by the user, so that the user can assign the PPE data to the chip by means of the C.A.M.P. G.T.S.

NFC (Near Field Communication) technology is now present on most smartphones and used every day for smart payments. Today, it also represents the future for the individual identification of products.

The **HF RFID** (High Frequency Radio Frequency Identification) communication system on which NFC is based allows the C.A.M.P. NFC TRACK to be easily read using any latest generation smartphone or for professionals using a PC reader.



NFC TRACK chip installed!



- G.T.S. - GEAR TRACKING SYSTEM

G.T.S. allows professionals to easily manage PPE both via the smartphone app (available on Play Store and Apple Store) and from a PC via the web app.

Two different packages allow for carrying out periodic inspections and also for managing the company allocation of PPE to its employees.

The database of **G.T.S.** includes the **technical information of all C.A.M.P. products** for work at height and a **large number of other products** posted by other users of the community with publicly available information.

