

Self-retracting fall arrester with a cable length of 10 m, equipped with handled mechanism for retrieval.
Can be used as a normal self-retracting fall arrester, the retrieval winch can be easily activated to safely rescue the worker in the event of an accident.

It can be installed hanging from an anchor point or fixed to the Tripod tripod legs using the special Cobra Lift Bracket (supplied separately).

Swivel connector equipped with fall indicator.

Galvanized steel cable d.4.8 mm. Working load limit: 150 kg.

Aluminum protection cover.



Ref.	Product name Nombre del producto	Weight Peso		Working load Max Carga de trabajo Max	CE	STANDARD
		kg	oz			
3503	COBRA LIFT 10 m	11.8	416.5	150	EN 360	EN 1496/B



**COBRA LIFT fixed to the Tripod legs
using the special
Cobra Lift Bracket (ref.3506)**




Cobra Lift Bracket (ref.3506)

Bracket for fastening the Cobra Lift device
on the legs of the Tripod.

COBRA LIFT selection of operating modes
COBRA LIFT selezione modalità di funzionamento
COBRA LIFT sélection des modalités de fonctionnement

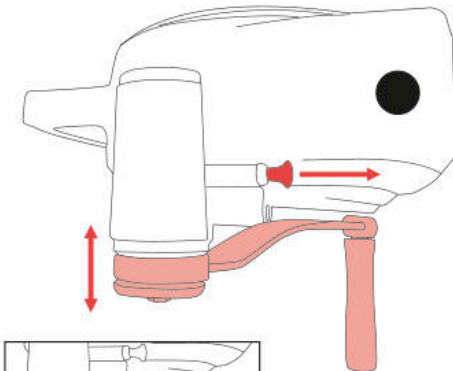


RESCUE
SOCCORSO
SECOURS




FALL ARREST
ANTICADUTA
ANTICHUTE



COBRA LIFT vertical use EN 360
COBRA LIFT uso verticale EN 360
COBRA LIFT utilisation verticale EN 360

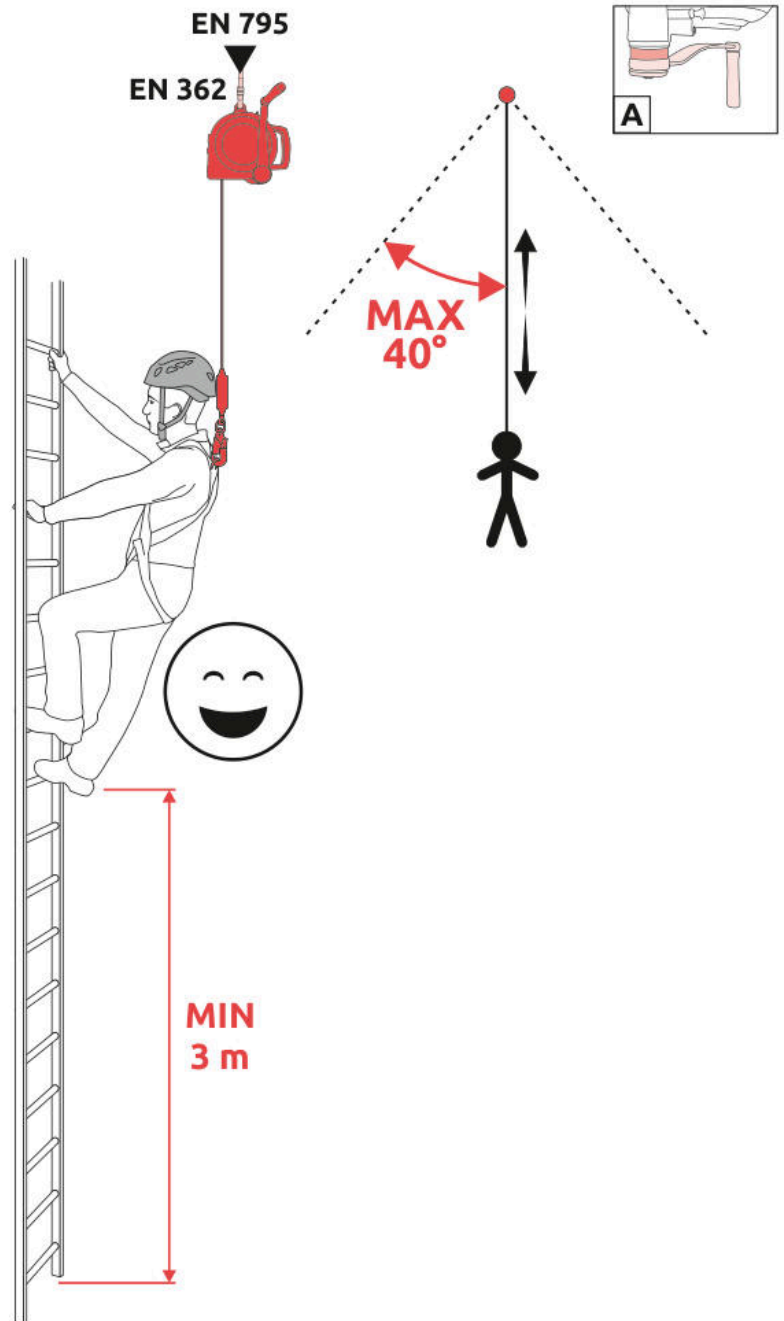


COBRA LIFT rescue recovery
COBRA LIFT recupero di soccorso
COBRA LIFT récupération par sauvetage

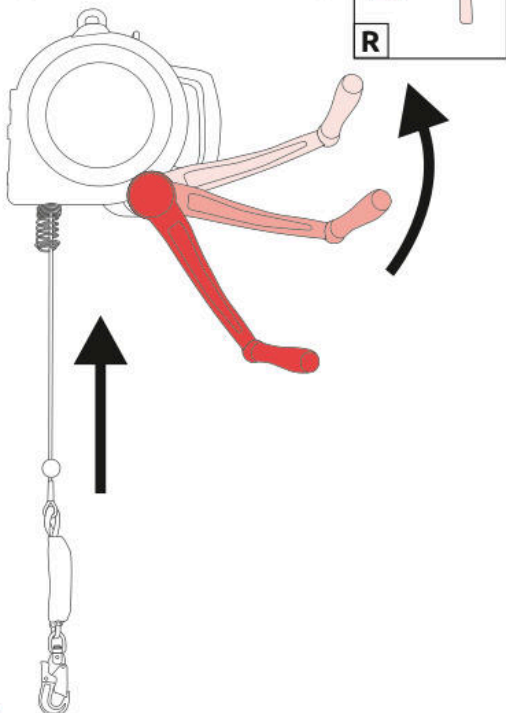

COBRA LIFT installation on TRIPOS
COBRA LIFT installazione su TRIPOS
COBRA LIFT installation sur TRIPOS

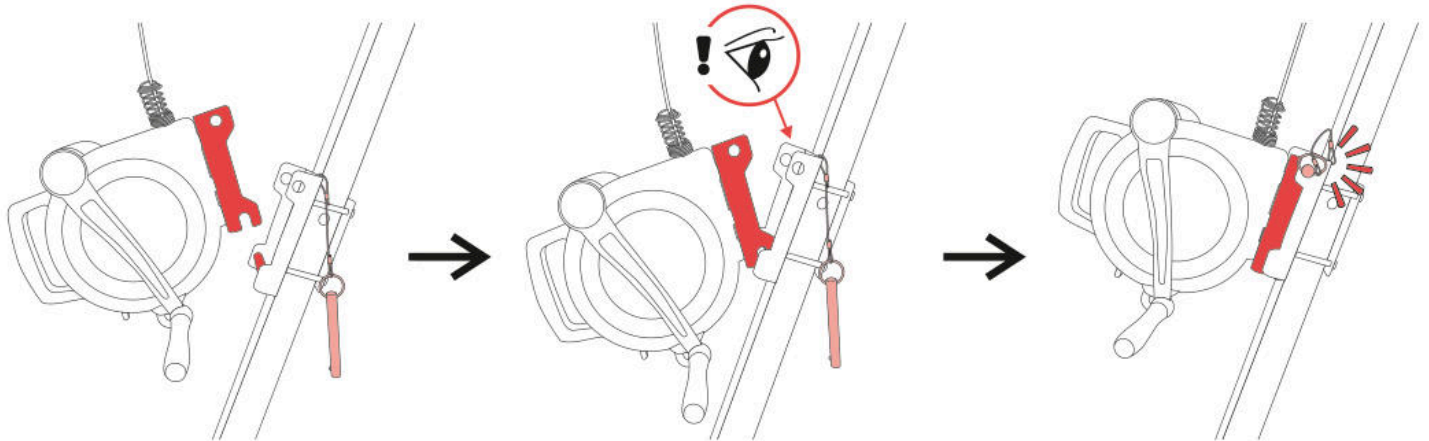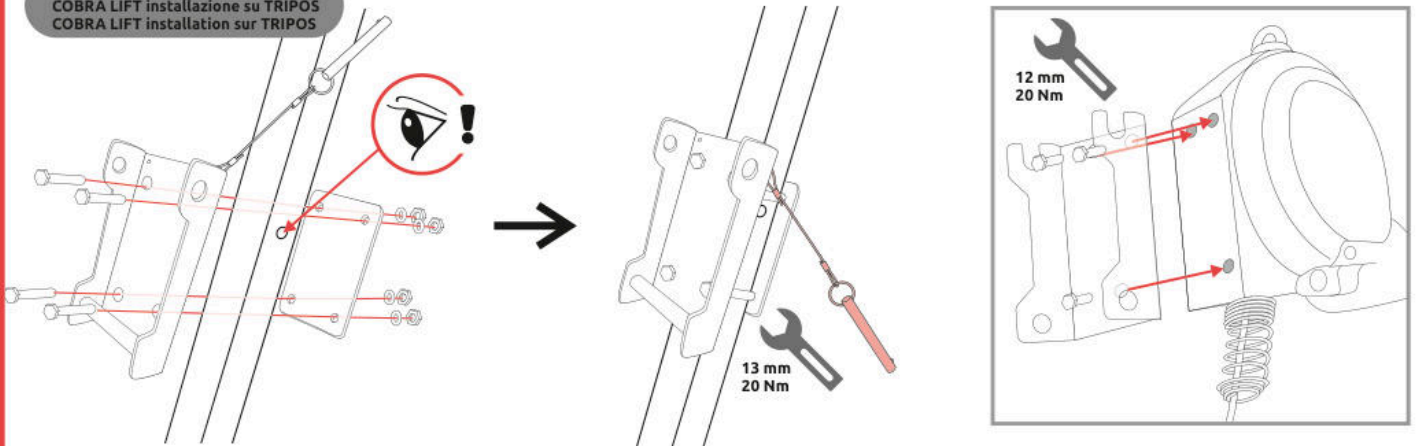

TRIPOS and COBRA LIFT, one user, with risk of falling from a height.
TRIPOS e COBRA LIFT, un utilizzatore, con rischio di caduta dall'alto.
TRIPOS et COBRA LIFT, un utilisateur, avec risque de chute de hauteur.

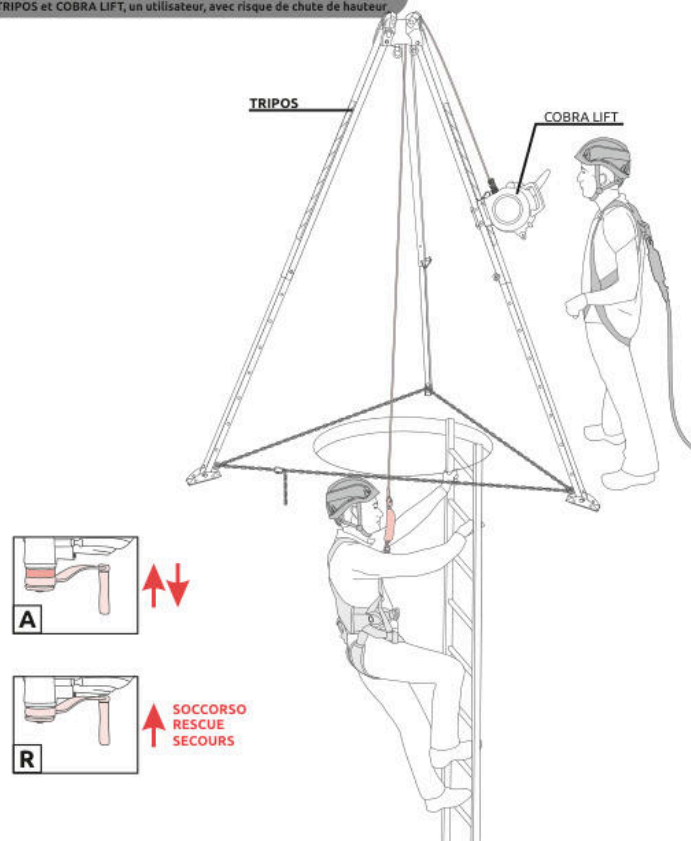

TRIPOS and two COBRA LIFT, two users, with risk of falling from a height
 TRIPOS e due COBRA LIFT, due utilizzatori, con rischio di caduta dall'alto
 TRIPOS et deux COBRA LIFT, deux utilisateurs, avec risque de chute de hauteur

