

Ref. 2034xxx

CONSTRUCTION, ROPE ACCESS, TOWERS/INDUSTRY, TEAM RESCUE

High strength anchor loops constructed from polyamide webbing covered with a 28 mm tubular webbing sheath that protects the structural webbing from abrasion or exposure to other hazards.


Color coded webbing for each different length: 60 cm orange, 80 cm blue, 120 cm green, 160 cm red.



2034060 Orange




2034080 Blue

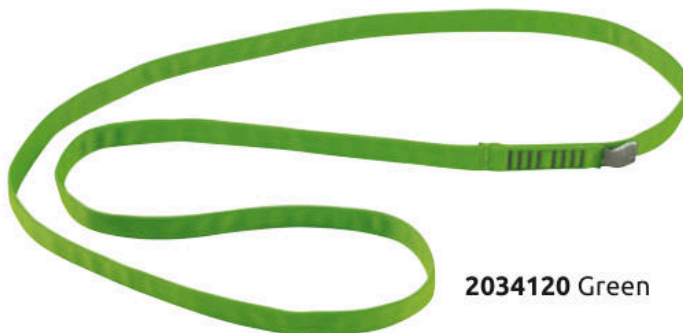

2034120 Green

TRUCK LOOP BLACK


2034060B - 2034080B - 2034120B - 2034160B

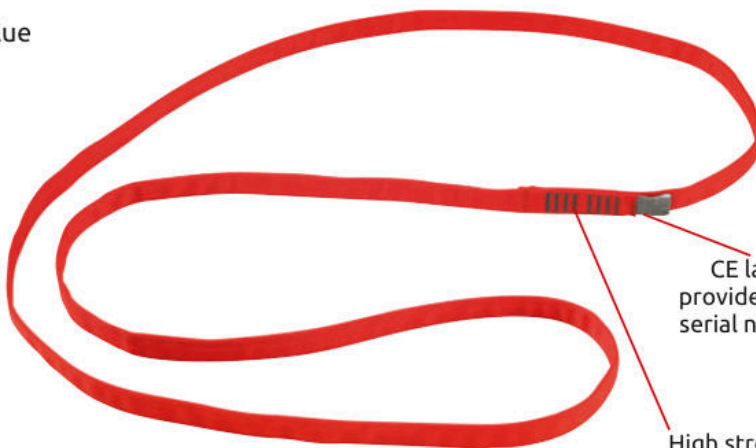

2034160 Red


CE label provided with serial number

High strength polyamid stitchings



EN 354

45 kN

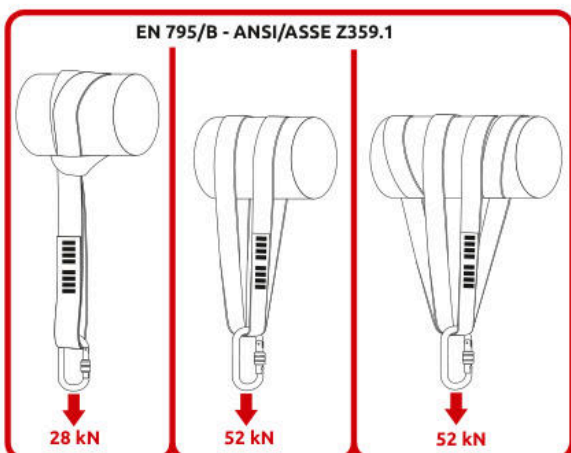

EN 795/B - ANSI/ASSE Z359.1


28 kN

52 kN

52 kN

Red colour of inner webbing is a damaging indicator of the outer webbing

Outer protective webbing sleeve Polyamid, width 28 mm



Inner main webbing Polyamid, width 25 mm

Ref.	Product name	Weight		Strength	CE		ANSI	EAC
		g	oz		EN 354	EN 795/B	Z359.1	
2034060	TRUCK LOOP 60 cm	110	3.9	45	•	•	•	•
2034080	TRUCK LOOP 80 cm	140	4.9	45	•	•	•	•
2034120	TRUCK LOOP 120 cm	200	7.1	45	•	•	•	•
2034160	TRUCK LOOP 160 cm	270	9.5	45	•	•	•	•