ENIGMA 3LOCK DOUBLE

SWIVELING CONNECTOR

PAT. PEND.

Ref. 3498

ROPE ACCESS, TREE CLIMBING, TEAM RESCUE, CONFINED

The Enigma 3 Lock Double integrates two triple lock carabiners and a swivel in a single device for quick and compact connections that can both pivot and tilt.
Ball bearings inside the swivel guarantee high load efficiency and do not require maintenance.
The pivoting connections of the two carabiners allow for a great range of orientations and movements.
The unique design opens the swivel with a single screw (key provided with product). The safety locking system is independent and opposite to the working direction of the device for safe and easy assembly.
Constructed completely from aluminum alloy and stainless steel for a very high breaking strength (23 kN) and a high working load limit (5 kN).

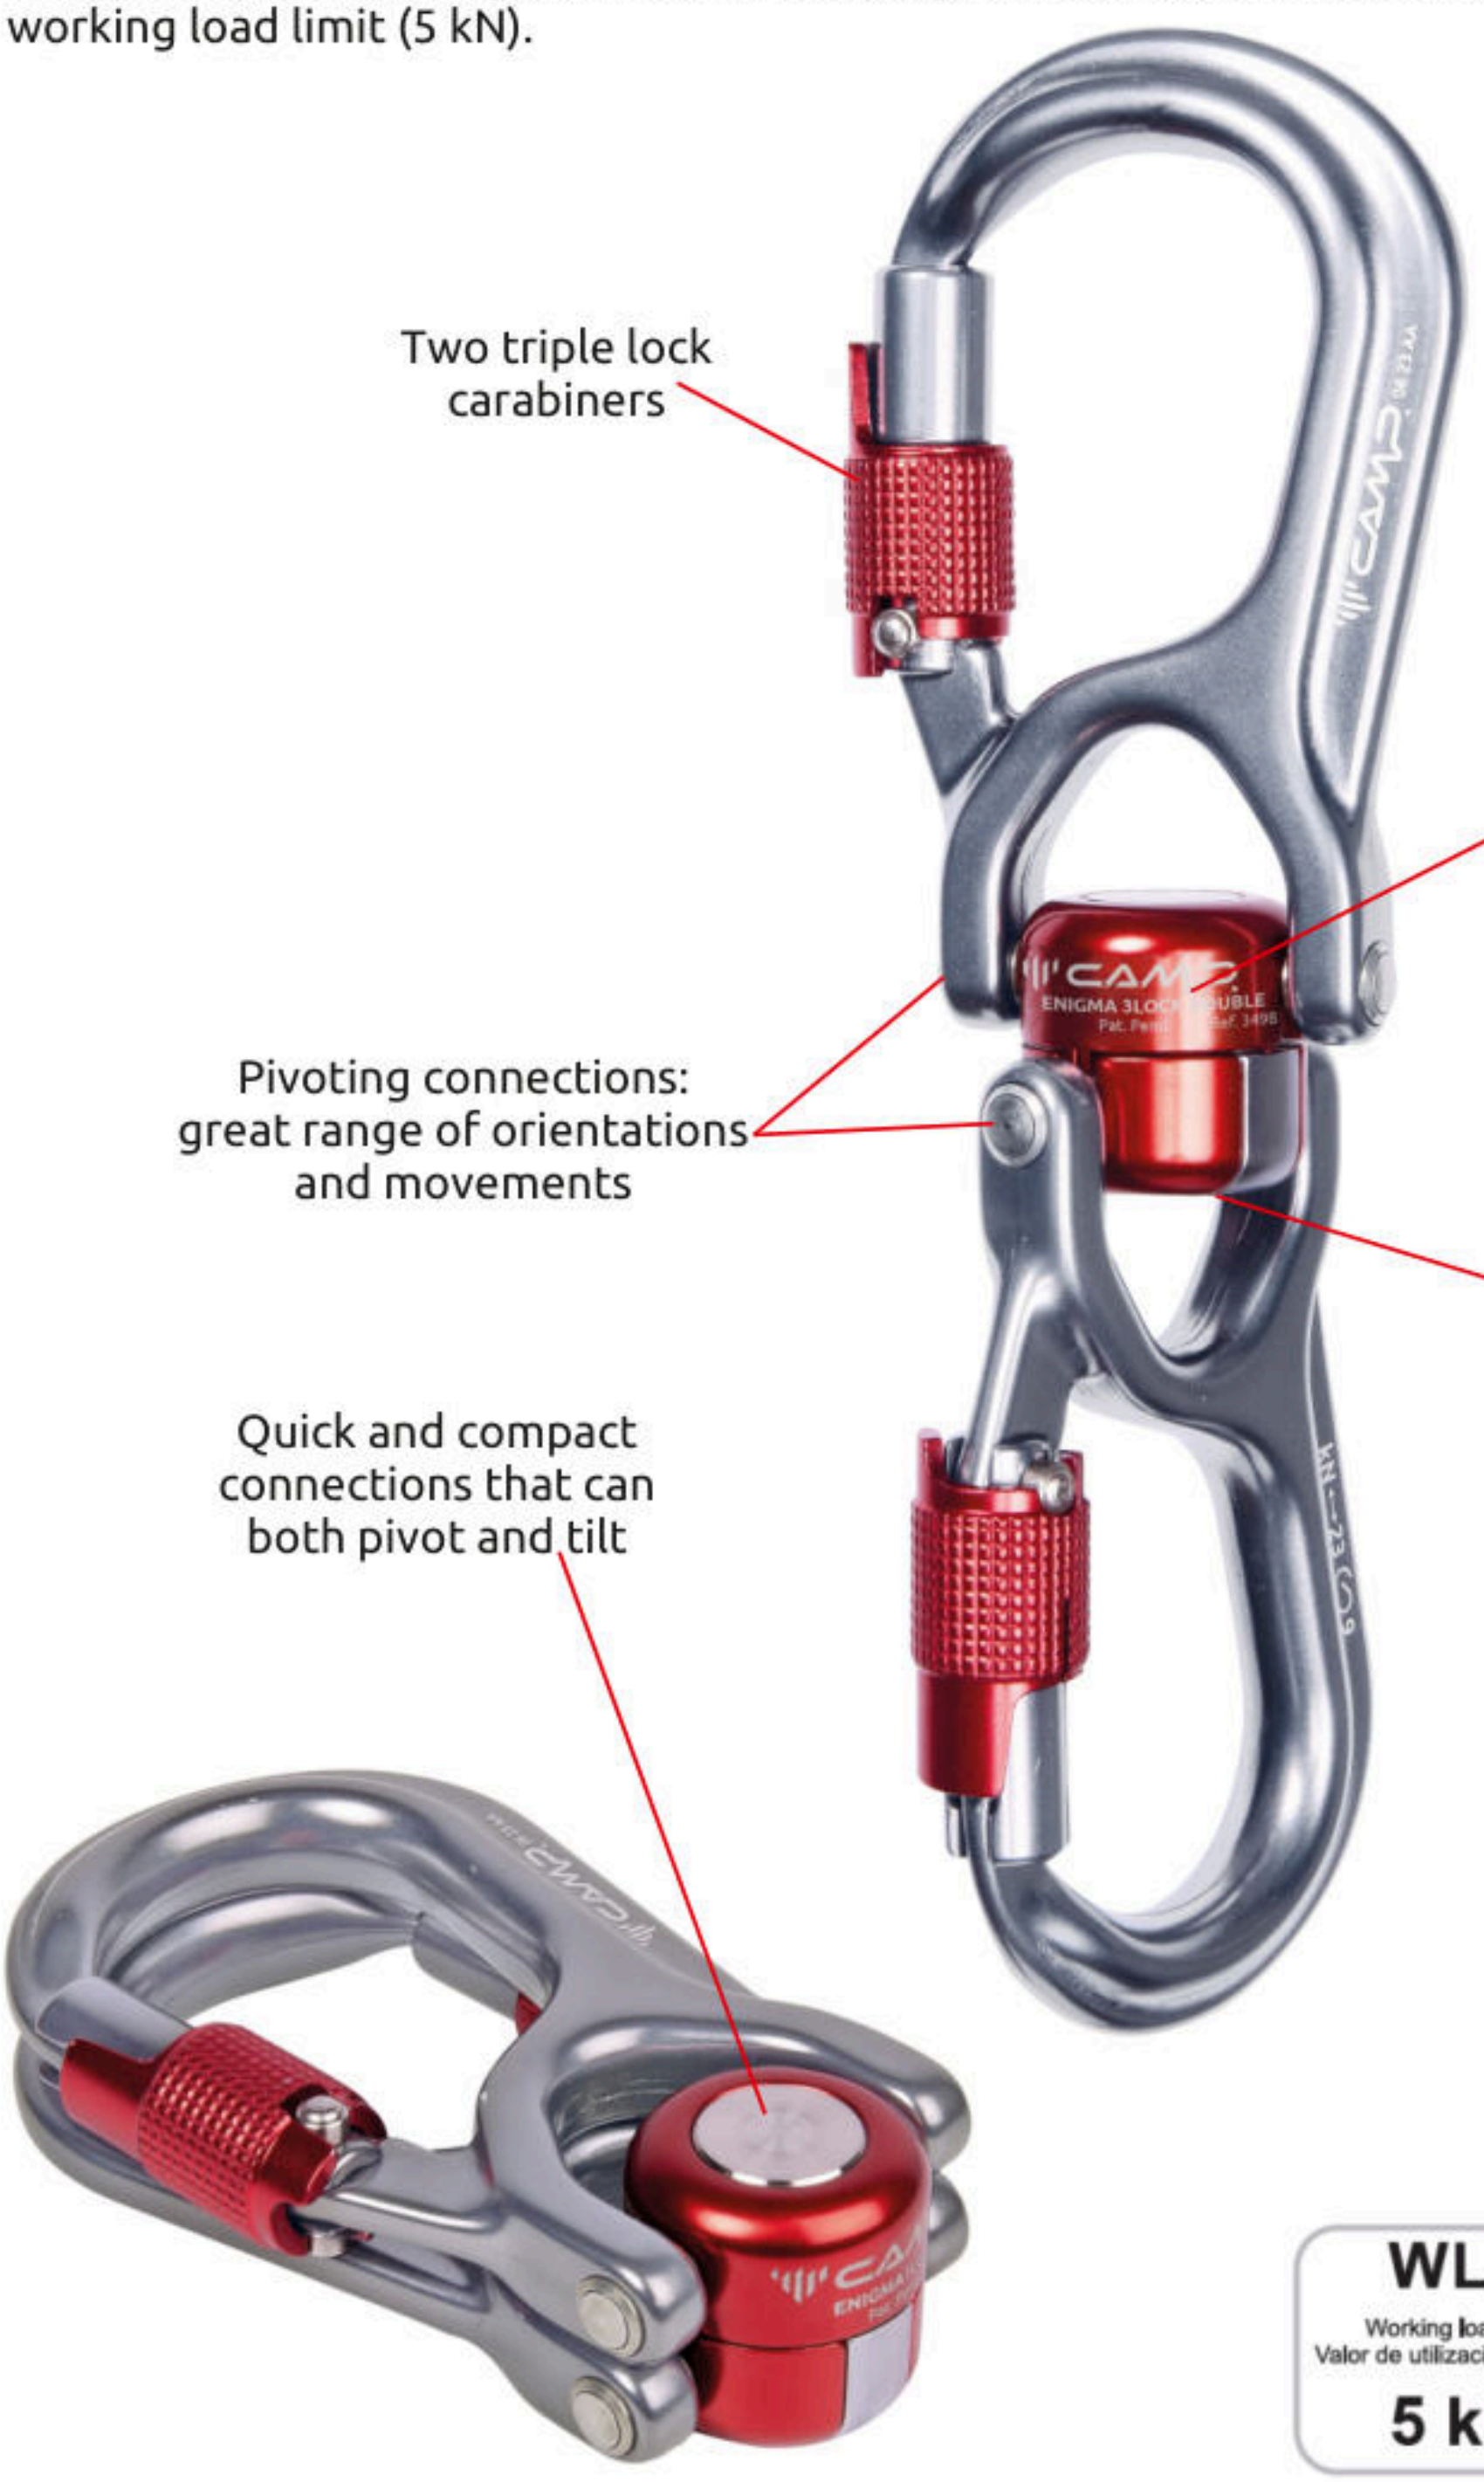
Two triple lock carabiners
Ball bearings inside the swivel guarantee high load efficiency and do not require maintenance
Pivoting connections: great range of orientations and movements
Single screw for the opening. The safety locking system is independent and opposite to the working direction of the device for safe and easy assembly
Quick and compact connections that can both pivot and tilt
CAMP
ENIGMA 3LOCK DOUBLE
Pat. Pend. Ref. 3498
kN 23 9



WLL
Working load limit
Valor de utilización máximo
5 kN

MBL
Minimum breaking load
Carga de ruptura minimo
23 kN

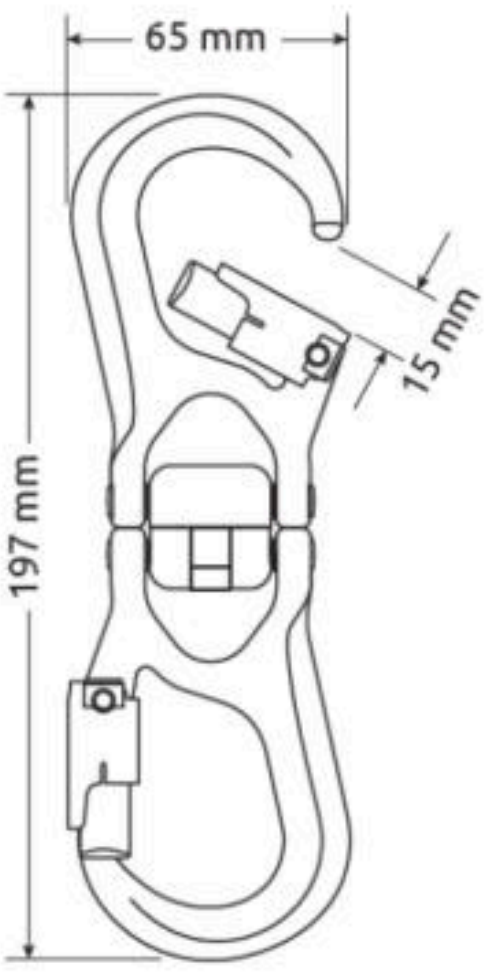
65 mm
197 mm
15 mm

Ref.	Product name Nombre del producto	Weight Peso		Strength Resistencia	‹⊘›	Working load Max Carga de trabajo Max	CE	CE		EAC
		g	oz	kN	kN	kN	PPE-R/11.135	EN 362	EN 12275	
3498	ENIGMA 3LOCK DOUBLE	215	7.6	23	9	5	•	A-T	T	•